


DMC 100NS PROFILE



Custom Fabrication



IDEAL APPLICATION RESIDENTIAL

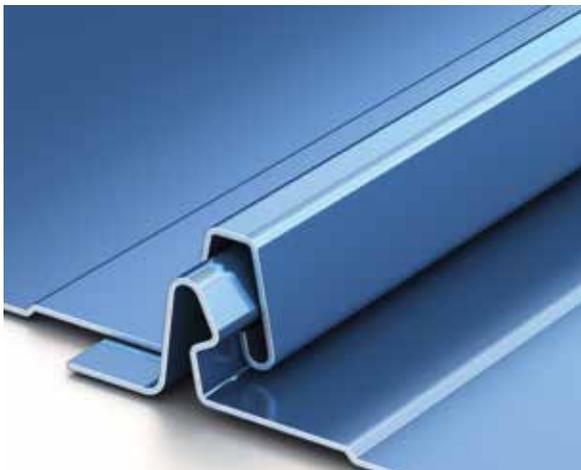

Our DMC 100NS profile offers unlimited design potential with its sleek, crisp appearance and attractive shadow lines. Eliminating the need for metal roof clips, the concealed 1" self-locking Snap Lock system creates a powerfully protective seal. Versatile and refined, this easy-to-install metal roof delivers superior beauty, durability and strength while showcasing architectural details.

KING AWNINGS 8392 S. Continental Divide Rd. #101 (800) 915-2980 www.kingawnings.com




©2016 Drexel Metals, Inc. All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Drexlume™ is a trademark of Drexel Metals, Inc. ENERGY STAR name and logo are registered U.S. marks and are owned by the U.S. government. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines: complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable.

DMC 100NS PROFILE




Custom Fabrication



AVAILABLE WIDTHS

16"

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

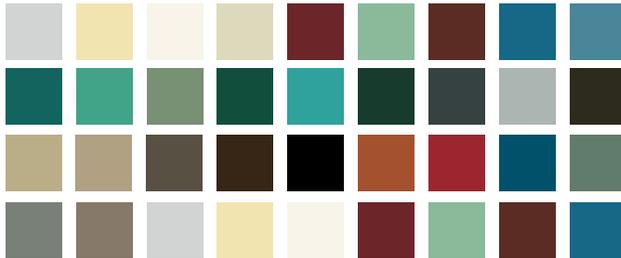

SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga
- Aluminum - .032"



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 3:12

MINIMUM ROOF PITCH

3:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- Florida Building Code Approved



Testing in accordance with

